

Circulate to: Sales Manager Accounting Service Manager Technician Parts Manager

Transom Bracket Replacement Kits

Models Affected

Models Covered	Model Year	Serial Number
Mercury/Mariner V6	2001 and prior	0T408999 and below
Mercury/Mariner V6 and L4 Verado	2002 and newer	0T409000 and above


Situation

Some engines produced during model year 2001 and prior may have interference with the trim system when using the current replacement heavy-duty transom brackets.


Correction

The heavy-duty brackets in kit P/N 8M0045121 have additional clearance for the style trim systems used in model year 2001 and prior.

Models Covered	Model Year	Transom Bracket Replacement Kits
Mercury/Mariner V6	2001 and prior	8M0045121
Mercury/Mariner V6 and L4 Verado	2002 and newer	828333A09

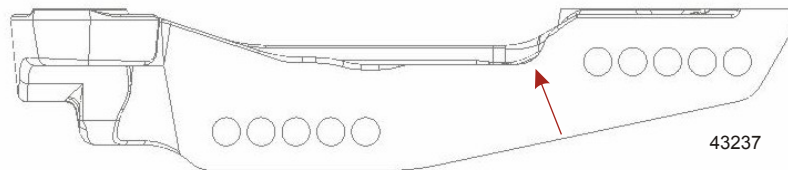

Heavy-duty transom bracket with added clearance

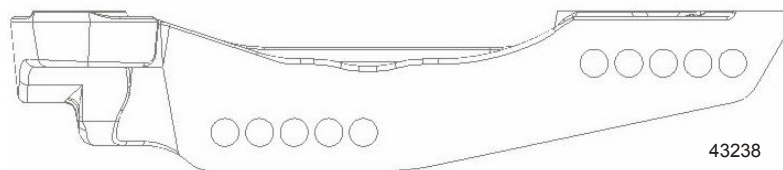

Standard heavy-duty transom bracket

Because of the heavier design features of these transom brackets, it is required to replace both brackets as a set.

Refer to the appropriate instruction sheet included in each kit and the appropriate service manual for the installation of the transom bracket.

Also review service bulletin 2007-17 for additional mounting information.

THE INFORMATION IN THIS DOCUMENT IS CONFIDENTIAL AND PROTECTED BY COPYRIGHT AND IS THE PROPERTY OF MERCURY MARINE.

This document is provided for the sole and exclusive use of the original recipient as prescribed by Mercury Marine and may not be distributed or copied, digitally or otherwise, without the prior written consent of Mercury Marine.