

B 0.3 Elektrik, Batterie, Lima

Gruppe	Nummer	Version
B 0.3	smc-07-86 vwm-07-06	01

Engine wirings by Durapart Industries AS

Due to the delivery of defective engine wirings by Durapart Industries AS, the engine wirings of the 5-cyl. TDI engines from VOLKSWAGEN Marine have to be replaced completely or partially.

Note:

In any case replace the wiring with part number 065 971 074A (arrow Fig. 1).

In addition replace the wiring with part number 065 971 072A (Fig. 2), if it bears the country-specific identification „Lithuania“.

You will find the part number and country-specific identification on the label marked with an arrow in Fig. 2.




The wiring with part number 065 971 072A and country-specific identification „Lithuania“ must **not** be replaced, if it is already tagged „100% O.K.“ (see identification mark – B - Fig. 2).

If you carry out operations on the engine wirings, please let us know, if you have to replace only one or both of the wirings.


We will line up with anything else to support you.

If you have any further inquiries please send an E-Mail to the adress stated below:

martin3.schneider@volkswagen.de

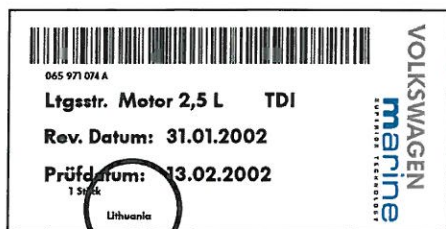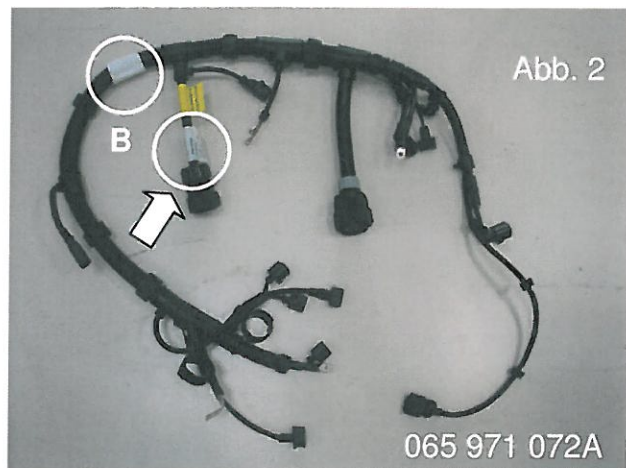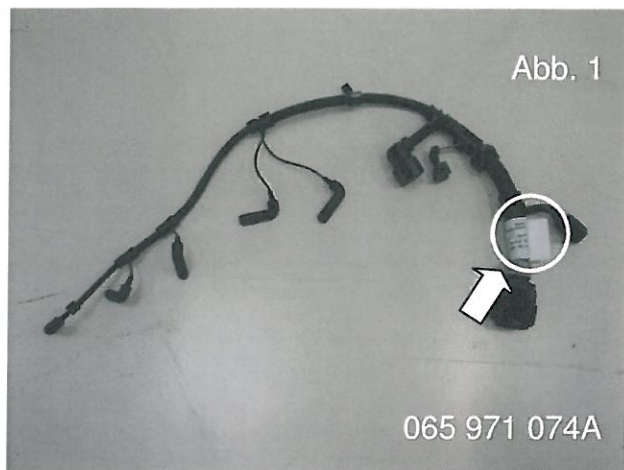

siehe -Pfeil
Abb. 1

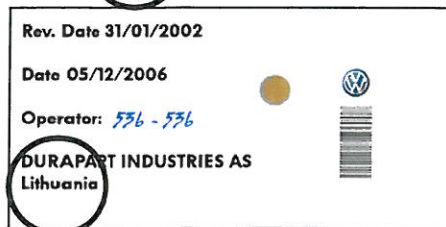

siehe Pfeil
Abb. 2